

Industrial WaterWorld®

SERVING THE PROCESS WATER AND WASTEWATER INDUSTRY

SEPTEMBER/OCTOBER 2006

**COOLING WATER
ECONOMICS**

**PUMPS, MOTORS &
DRIVES**

CHEMICAL FEED

VALVES

**Boilers, Water Sampling &
Monitoring Systems**

POWER-GEN Preview

Automated Chemical Dosing via Flexible Screw Conveyor Improves Filtration

BY DAVID BOGER

Oberlin Filter Co. is a Waukesha, WI-based manufacturer of high pressure flat-bed, liquid-solid filtration systems for demanding applications such as filtering heavy metals and resins from colloidal suspensions. Its top-of-the-line DMax™ filtration system, which cleans “impregnation resin” wastewater, requires a dry chemical delivery system that provides more precise, cleaner and safer dosing than achievable using manual methods of delivery.

“The key to dropping out heavy metals and separating resins from colloidal suspensions is to introduce exactly the right dry ingredient into the wastewater – consistently and in large volumes,” explains Jeff Koepnick, Oberlin Filter’s project manager, “precisely what Flexicon’s flexible screw conveyor accomplishes.”

Chemical Precision

The DMax system integrates Oberlin pressure filter technology with a pre-treatment process that uses a flexible screw conveyor to introduce precisely measured amounts of dry chemicals into the wastewater, without the spillage or dust associated with manual dumping. The chemicals cause minute waste products to clump together as larger solids, or flocculate, which can be filtered out for discharge or disposal as dry cake. The cleaned wastewater can be continuously re-used in the original application or discharged as cleaned and permitted water.

Matching Conveyor to Process

“We researched numerous conveyor systems before determining that a flexible screw conveyor would be the best answer for consistent delivery of a variety of large quantities of dry chemicals. Our engineers chose the flexible screw conveyor because it can convey vertically as well as horizontally. It’s durable and

can accommodate small configurations,” says Koepnick.

Oberlin Filter looked at competing units and selected a flexible screw conveyor from Flexicon Corp.

“We knew we had to have a conveyor that was built tough, required little or no maintenance, and could reliably convey whatever quantities and kinds of dry chemicals were needed,” Koepnick adds. “Flexicon ran our DMax process in its test lab demonstrating that the convey-



Oberlin Filter’s DMax filtration system features an automated dry chemical delivery system that provides more precise dosing than possible with manual methods. A hopper and flexible screw conveyor from Flexicon Corp. deliver dry treatment chemicals to the wastewater holding tank.

or would deliver our dry ingredients according to specifications – and they did the same in our plant. We knew exactly how the conveyor would perform before we bought anything.”


The company purchased a Flexicon Model 1250 conveyor with a 3-in diameter x 10-ft long tube. The conveyor, combined in-line with Oberlin’s smallest filter and tanks, results in a machine train that’s 6 ft wide x 27 ft long. When treatment of large (8-ft) tanks of water is required, Oberlin adds a Flexicon bulk bag discharger to the filter system to deliver large quantities of dry chemicals.

Enclosed, dust-free conveyor improves plant hygiene

According to Koepnick, “The conveyor has only one moving part that contacts the dry chemicals – a durable, replaceable, flexible screw that’s driven by an electric motor.”

As the screw rotates, the chemical is propelled forward, and the screw self-centers within the conveyor tube. A removable clean-out cap at the intake end of the tube allows it to be emptied, flushed, disassembled and washed – precluding cross contamination if multiple chemical agents are used.

The working tank is equipped with high- and low-level sensors that signal

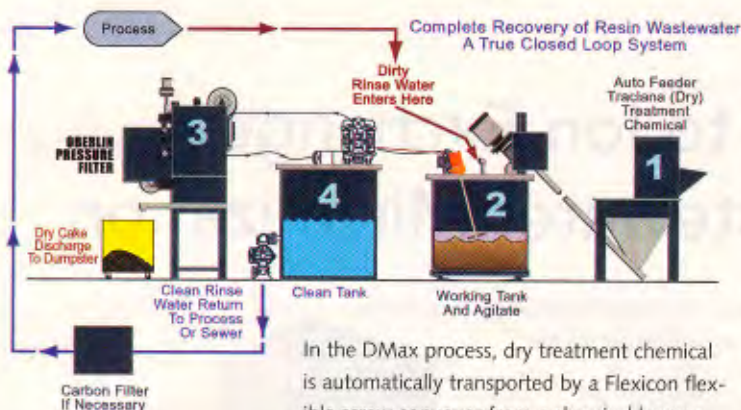

a PLC to automatically control the material feed, thereby delivering the correct amount of dry chemicals while eliminating the need for manual dumping and the risk of spillage and dust.

Koepnick says some cleaning systems require up to 50 pounds of dry chemicals per day, which previously required workers to lift heavy bags of

In the DMax process, dry treatment chemical is automatically transported by a Flexicon flexible screw conveyor from a chemical hopper (#1) to a working tank (#2) with colloidal rinse water from a manufacturing process. The dirty water and chemical mixture is agitated for a preset time, then automatically discharged into a pressure filter (#3) that removes solids and discharges liquids into a clean tank (#4). An equal volume of clean rinse water is pumped from the clean tank to the process tank to maintain liquid levels.

system doesn't incur a dust problem.

"Most companies discharge cleaning water at the end of the day," he concludes,

material overhead for dumping into small hoppers atop large tanks, creating dust and spillage. The conveyor's hopper, with a dump height of less than 4-ft (122 cm), averts that problem.

Although the treatment chemicals are non-toxic and non-hazardous, Koepnick says, "Customers are happy that their wastewater clarification sys-

"but the addition of automated conveying to the system enables our customers to reuse wastewater and/or discharge cleaner wastewater, reducing both cost and environmental impact."

Oberlin's DMax system has been used successfully to treat heavy metal, emulsified, vibratory and color dye wastewater. The company's basic line of filtration equipment has been an integral part of precision grinding coolant technology, automotive paint/zinc phosphate lines and power plant salt crystallization systems for over 35 years. www.oberlin.com

About the Author: David Boger is sales manager at Flexicon Corp., of Bethlehem, PA. He holds a bachelor's degree in chemical engineering from Rensselaer Polytechnic Institute in Troy, NY. Contact: 888-353-9426 or sales@flexicon.com.

Circle No. 118 on Reader Service Card

Good Looks Now Come in all *Shapes* and *Sizes*.



POLYROK®

Lightweight, functional and aesthetically pleasing. With or without insulation and heat, the POLYROK hides and protects your valve while enhancing the landscape.

ASSE 1060 Certified

Twenty years ago, our HOTBOX® enclosure spawned a whole new industry. Today, we're still the pipe, valve and pump protection product that designers, distributors and contractors call for by name. We have the industry's broadest line of products, most of which have been ASSE certified; and we sell more enclosures than anyone else. Talk to our sales or engineering specialists today to see which design will be best for your climate and application.

Web hot-box.com

Email sales@hot-box.com

Phone 800.736.0238

Fax 904.783.6965



Affiliated companies of CDR Systems Group: HotBox®, Osmore® & AEGIS.

Circle No. 34 on Reader Service Card

Which manufacturer has a proven track record of outstanding pump performance in Industrial applications?

Fairbanks Morse
Pentair Water

See us at WEFTEC
Booth #1730



For Industrial Pumps we're the one to call on!

913/371-5000

www.fmpump.com

Circle No. 35 on Reader Service Card