


FEATURES

- Waste treatment
- Design and construction of a chemical plant
- Solids handling
- Corrosion and coatings

OCTOBER 2009

HYT 137 CHEMICAL ENGINEERING

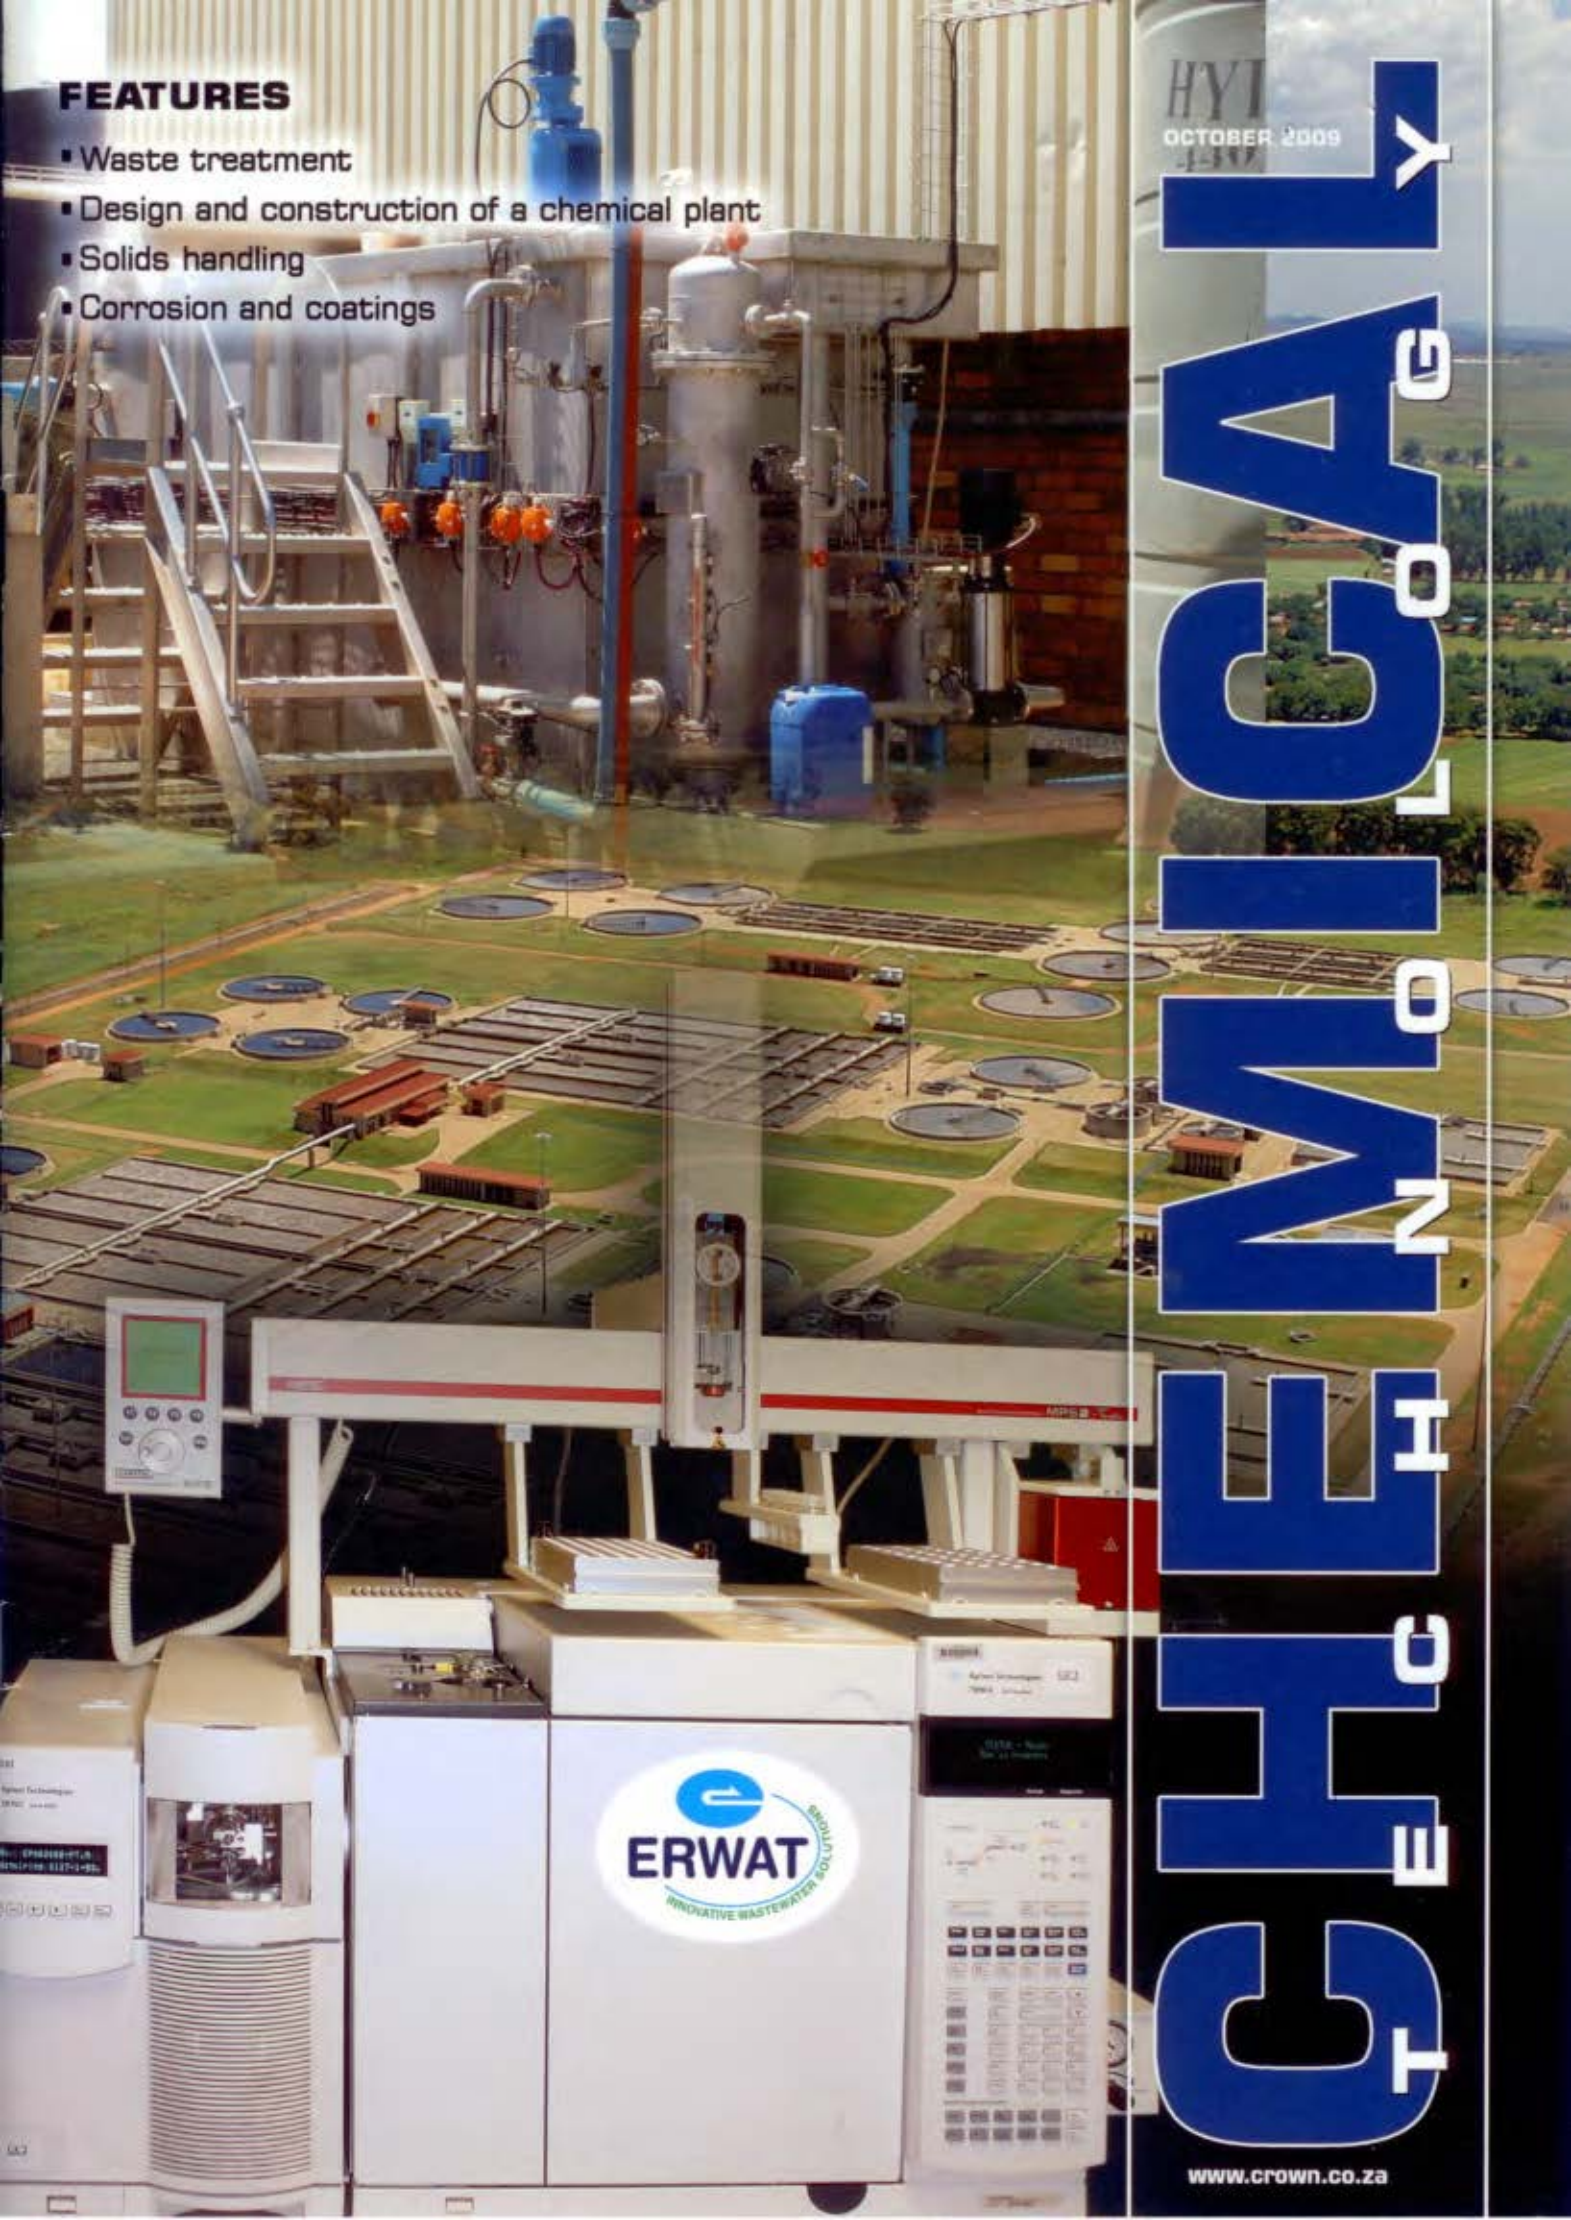

ERWAT
INNOVATIVE WASTEWATER SOLUTIONS

Bulk handling system prevents dust at pencil

BORROWDALE, IN ENGLAND'S picturesque Lake District, is well-known among hikers, but it also has another claim to fame as the home of the Cumberland Pencil Co. Started as a cottage industry in the mid-19th century to make pencils from locally mined graphite, the company now produces some 750 000 fine art and graphic pencils per week. The pencils are sold worldwide under the brand name of Derwent.

While graphite was the foundation of Cumberland's business, the product mix now includes multiple grades of both 'lead' and coloured pencils. In the case of coloured pencils, the main raw material ingredient is china clay. This is mixed with other additives to achieve the desired solid

A bulk bag is mounted in the frame, ready to discharge clay into the receiving hopper via the Tele-Tube™ assembly



The Spout Lock™ clamp ring and Tele-Tube™ telescoping tube allow a quick, dust-tight connection between the bag spout and the hopper and elongate the bag as it empties, thereby promoting flow



or pastel colours and other characteristics — for example, a pencil may be soft, hard, chalky, crumbly, or soluble.

Problem of air-borne dust

China clay is a semi free-flowing powder that tends to be aerated when it is exposed to the atmosphere, and the way it was handled in the plant caused a problem of airborne dust. Cumberland received the clay in 25 kg bags, which were manually carried to a weigh station. There, the bags were opened and the contents weighed, along with as many as eight other additives needed for the recipe. The material was refilled into empty bags, and when the batch was complete the bags were manually dumped into a mixer for blending. The emptying and refilling of the bags, and their subsequent discharge into the blender, all contributed to spillage of material and airborne dust.

After considering possible solutions, Cumberland settled on an automated, bulk-solids handling system that transfers clay to the blender with no exposure to the atmosphere. Designed and manufactured by Flexicon (Europe), the sealed system consists of a discharge frame that empties bulk bags of clay into a receiving hopper, from which the material is transferred by a flexible screw conveyor to a weigh hopper. Besides eliminating dust, the system has also minimized the clay's tendencies to cake, smear, pack, bridge, cavitate and Rathole.

New arrangement

Under the new arrangement, clay is received in one tonne bags. When a bag is needed, it is transported by a forklift truck to the bulk-bag discharge frame, which has a cantilevered I-beam, electric hoist and trolley. The bag's carry handles

A flexible-screw conveyor (the narrow tube in the middle of the photo) transfers product to the weigh hopper, which is mounted on load cells that transmit gain-in-weight information to the control panel



are attached to a cruciform connected to the hoist, then the bag is located precisely above the receiving hopper.

The bag's contents are discharged into the 225 L capacity hopper through a sealed, telescoping tube, called a Tele-Tube™, which provides a dust-tight interface. The bottom end of the tube is connected to a collar in the lid of the sealed hopper and the top end has a patented Spout-Lock™ clamp ring that attaches to the bag's spout.

A push-button, pneumatic control raises the top of the telescoping tube toward the bag, with the clamp ring in the open position, allowing the bag spout to be pulled through the ring. The clean side of the bag spout is pulled down over the clean side of the telescoping tube and the ring is locked in place over it, then the tube assembly is lowered until the bag spout is pulled taut.

Once the spout is untied, the telescoping tube assembly exerts continual downward tension on the spout, elongating the bag as it empties into the hopper. The tension keeps the spout taut and helps maintain a steady flow of material. The discharger is also equipped with Flow-Flexer™ bag activators — two pneumatically-driven plates that raise and lower opposing bottom edges of the bag at timed intervals, loosening compacted material and promoting material flow into the discharge spout. As the bag lightens, the stroke of the bag activators increases, forming the bag into a steep 'V' shape. This eliminates dead spots and results in total evacuation of material, with no manual intervention. A hopper screen filters out foreign bodies from the clay.

From the receiving hopper, the clay is gravity-fed into the throat of a 3 m long flexible screw conveyor that transfers the clay vertically into a 40-kg-capacity conical

When the weigh hopper reaches its target weight, the batch of clay is discharged into a bag and taken to the blender



manufacturing plant



China clay makes a pretty reflection in repose, but can cause airborne dust when it is transferred in the open



A sample of Cumberland's Derwent pencils

weigh hopper. Feeding is assisted by a side-mounted, 'Flexifinger' vibratory flow-promotion device.

The screw conveyor consists of a flexible screw, housed in a 168 mm diameter tube. It has a 'flat' configuration, designed for efficient transport of non-free-flowing materials. It is driven from its top end by an electric motor with right-angled gear drive assembly, located above the material-discharge point, preventing powder from contacting and damaging the drive seals.

Since the screw is fully enclosed, there is no spillage or dust. Unlike rigid auger screws, the flexible screw self-centres within the conveyor tube as it rotates, providing ample clearance between the screw and the tube wall to reduce or eliminate grinding.

The weigh hopper is mounted on load cells that transmit gain-in-weight data to the control system, which reduces the flowrate to a trickle as the batch nears its pre-determined target weight. When the target weight is reached, a pneumatically

activated slide-gate valve opens to allow gravity discharge of the measured batch into a bag, still under tight dust-control conditions. The bag is then taken to the mixer for blending with other ingredients of that particular recipe. If any material from a measured batch is unused, the excess can be returned to the main hopper by lifting an access flap and pouring the powder through the screen.

For more information contact Flexicon Africa on tel: +27 41 453 1871 or email sales@flexicon.co.za.



Convey

a broad range of powder and bulk solids to/from multiple discharge/inlet points with Flexicon's positive pressure or vacuum dilute-phase Pneumatic Conveying Systems. Fully integrated with your process.



Feed

bulk solids from large pellets to sub-micron powders in any direction, around obstructions, over short or long distances, with no separation of blends, dust-free at low cost, with Flexicon Flexible Screw Conveyors.



Condition

material that has solidified during storage and shipment with Flexicon Bulk Bag Conditioners. Variable height turntable allows hydraulic rams with contoured end plates to loosen contents for discharge through bag spouts.



Unload

free- and non-free-flowing solids from bulk bags automatically with Flexicon Bulk Bag Unloaders. Untie full bags, retie partially empty bags and collapse empty bags—all dust-free. Available with weigh batching controls.



Fill

bulk bags with free- and non-free-flowing bulk solids with TWIN-CENTREPOST™, REAR-POST and SWING-DOWN™ Bulk Bag Fillers. Available with numerous performance enhancements for low to high capacity applications.



Batch

multiple bulk materials by weight from nearby or distant plant locations, blend the batch and discharge/convey it automatically with Flexicon Weigh Batching and Blending Systems.

SOUTH AFRICA
+27 (0)41 453 1871
sales@flexicon.co.za

UK +44 (0)1227 374710
USA +1 610 814 2400
AUSTRALIA +61 (0)2 9484 2083

flexicon
.co.za

1950X



Abrasive materials



Large particles



Products that pack, cake, smear



Materials that fluidize



Free-flowing materials



Blends of dissimilar ingredients